


Type TRS

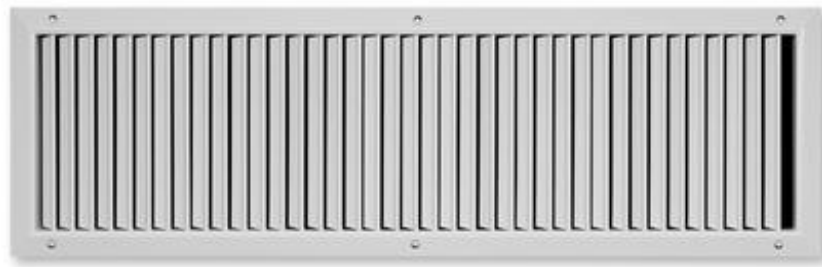

Consisting of a front border with vertical, individually adjustable front blades, for visible screw fixing (counter punched holes). These can also be supplied with concealed screw fixing on request.

TECHNOLOGY

rectangular

10 – 1,665 l/s

40 – 6,000 m³/h

24 – 3,530 cfm

L: 225 – 1,225 mm

H: 75 – 325 mm

Steel

TROX Nederland B.V.



Veersteeg 11, 4212 LR Spijk
Postbus 225, 4200 AE Gorinchem
Tel.: +31 (0)183 767300
Fax.: +31 (0)183 767399
Email: trox@trox.nl

Online-Services

Orderstatus (My TROX-NET)

Uw contactpersoon

Online service contact formulier

Aanvraag prijslijst TROX klimaat

Levertijden: productietijd+2
werkdagen

Service-Hotlines

TROX Nederland B.V.

Tel.: +31 (0)183 767 300

Fax : +31 (0)183 767 399

[Contact](#)